

How to reconnect inverter to wifi




Huawei Technologies Co. Ltd.

Version	Created by	Date	Remarks
01	Huawei c84155479	30.06.2022	0


The information in this document may contain predictive statements including, without limitation, statements regarding the future financial and operating results, future product portfolio, new technology, etc. There are a number of factors that could cause actual results and developments to differ materially from those expressed or implied in the predictive statements. Therefore, such information is provided for reference purpose only and constitutes neither an offer nor an acceptance. Huawei may change the information at any time without notice.

This document describes how to reconnect inverter to wifi by using fusion solar application and user login +Owner account


1. Login on the owner account on the application:

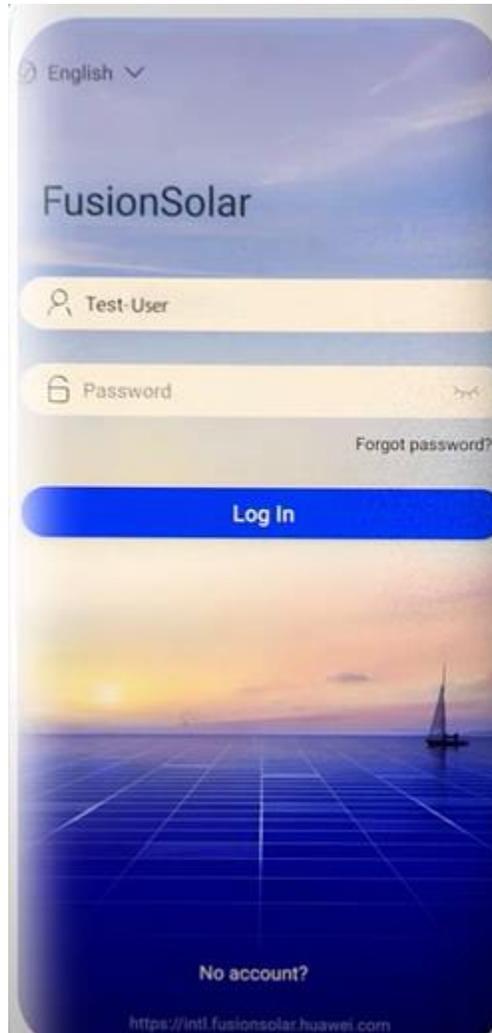

2. Press on Me-Device commissioning:

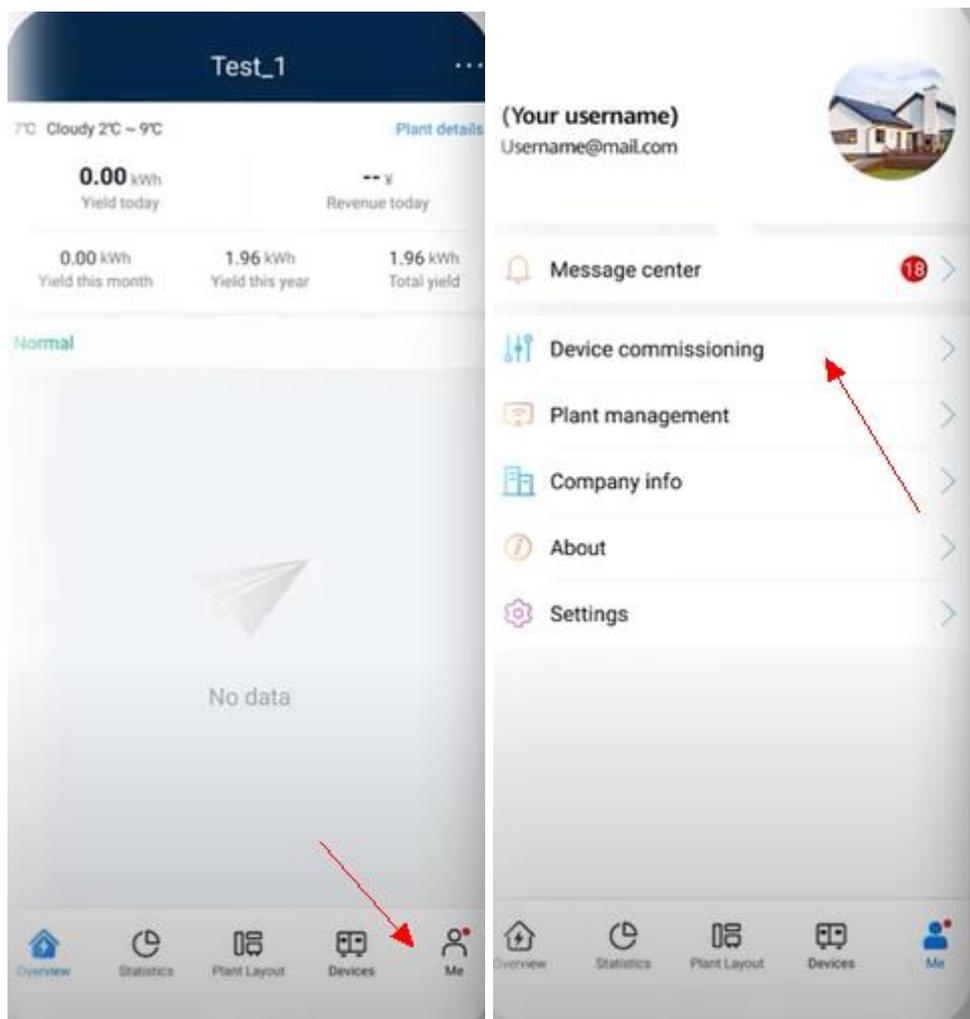

3. Press Connect and scan the QR code from inverter and approve requirements :

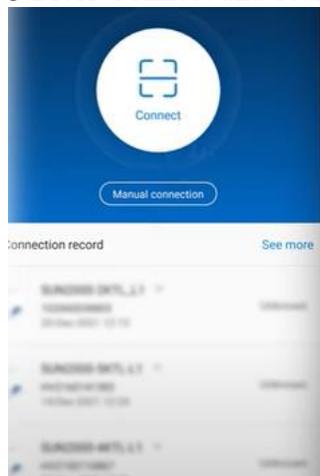

Click **"Connect"**
Scan the QR Code on the right side of the inverter

Connection requirements:

- Location permission is mandatory
- The App needs access to the Camera
- Your Wi-Fi connection must be enabled and disconnected from other devices, like a local router.

4. After the scanning is done the Identity authentication option will appear, use the USER :



Identity authentication

SN:100000000000

User

Enter your password.

Security level:

Enter the password again.

Set the password at the first login.

The password is 00000a, if the app will ask to update the device press YES and wait until is done.


After the update is done wait until the inverter is turned on full (DC, AC led are steady green) and connect to the inverter in the same way .

After the login to USER is done follow the next screenshots:

1.Press on the 3 Dots from right corner:



2.Go to Settings –Router connection settings –select the router and put the password.

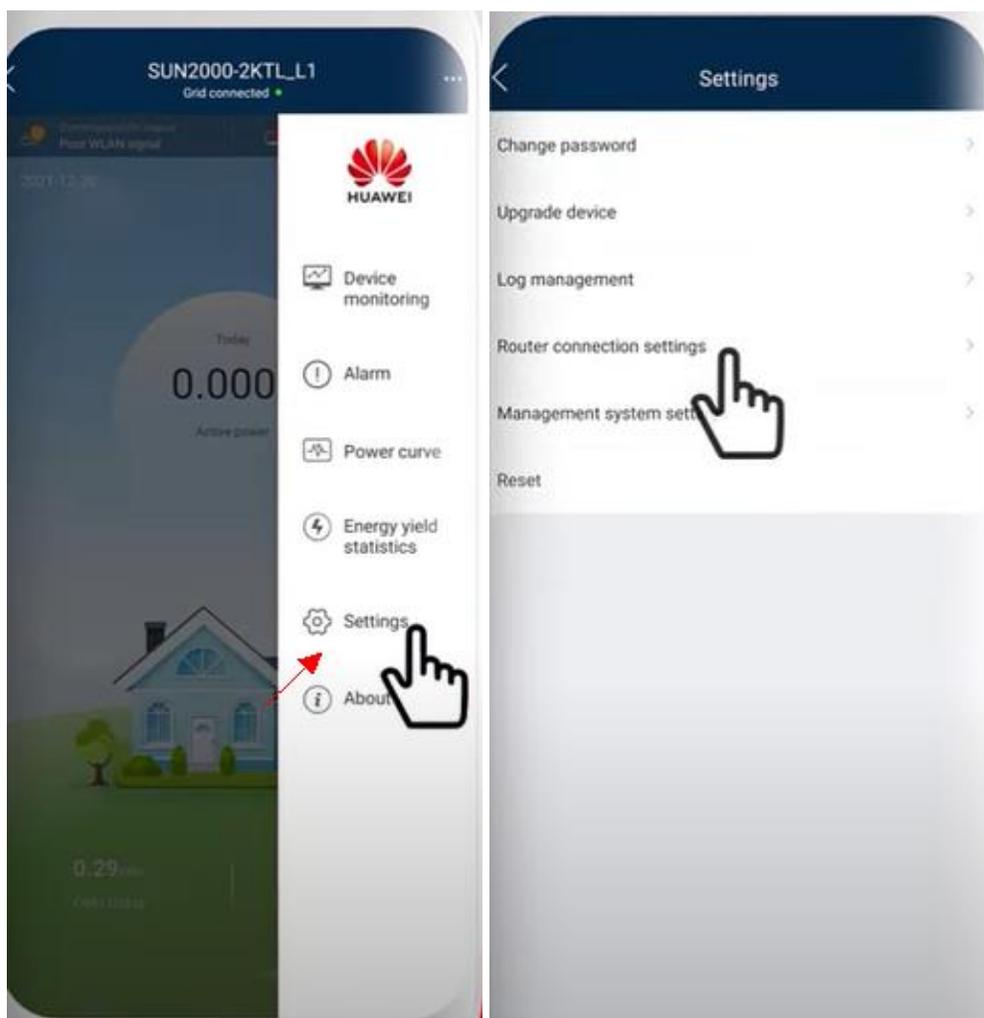

3. After the connection to router is done go one step back and select Management system and press connect:

